



CRC internal peripheral



Contents

1. CRC internal peripheral	3
2. STM32MP15 resources	6
3. Crypto API overview	6
4. STM32CubeMP1 architecture	6
5. STM32CubeMX	6
6. STM32MPU Embedded Software architecture overview	7
7. How to assign an internal peripheral to a runtime context	7



CRC internal peripheral

Stable: 12.02.2020 - 16:39 / Revision: 12.02.2020 - 16:37

Contents

1 Article purpose	3
2 Peripheral overview	3
2.1 Features	3
2.2 Security support	4
3 Peripheral usage and associated software	4
3.1 Boot time	4
3.2 Runtime	4
3.2.1 Overview	4
3.2.2 Software frameworks	4
3.2.3 Peripheral configuration	5
3.2.4 Peripheral assignment	5
4 How to go further	6
5 References	6

1 Article purpose

The purpose of this article is to

- briefly introduce the CRC peripheral and its main features
- indicate the level of security supported by this hardware block
- explain how each instance can be allocated to the three runtime contexts and linked to the corresponding software components
- explain how to configure the CRC peripheral.

2 Peripheral overview

The **CRC** peripheral is used to verify data transmission or storage integrity.

2.1 Features

Refer to the [STM32MP15 reference manuals](#) for the complete list of features, and to the software components, introduced below, to see which features are implemented.



2.2 Security support

CRC1 and CRC2 are **non secure** peripherals.

3 Peripheral usage and associated software

3.1 Boot time

CRC instances are not used at boot time.

3.2 Runtime

3.2.1 Overview

CRC instances can be allocated to:

- the Arm® Cortex®-A7 non-secure for using in Linux® with Linux Crypto framework

or

- the Arm® Cortex®-M4 for using in STM32Cube with STM32Cube CRC driver

Chapter [Peripheral assignment](#) describes which peripheral instance can be assigned to which context.

3.2.2 Software frameworks

Do	Peri	Software frameworks			Comment
mai Cor tex -A7 sec ure (O P- TE E)	Cor tex -A7 no n- sec ure (Li nux)	Cortex-M4 (STM32Cube)			
			Linux Crypto framework	STM32Cube CRC driver	
Se cu rity	C R C				

3.2.3 Peripheral configuration

The configuration is applied by the firmware running in the context to which the peripheral is assigned. The configuration can be done alone via the [STM32CubeMX](#) tool for all internal peripherals, and then manually completed (particularly for external peripherals), according to the information given in the corresponding software framework article.


3.2.4 Peripheral assignment

Check boxes illustrate the possible peripheral allocations supported by [STM32 MPU Embedded Software](#):

- means that the peripheral can be assigned () to the given runtime context.
- is used for system peripherals that cannot be unchecked because they are statically connected in the device.

Refer to [How to assign an internal peripheral to a runtime context](#) for more information on how to assign peripherals manually or via [STM32CubeMX](#).

The present chapter describes STMicroelectronics recommendations or choice of implementation. Additional possibilities might be described in [STM32MP15 reference manuals](#).

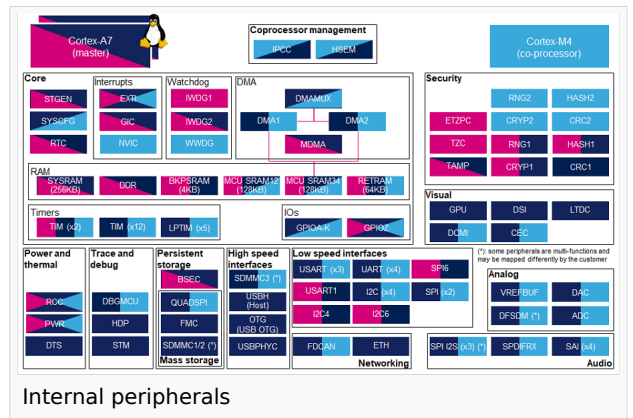

Internal peripherals

Do	Per	Runtime allocation				Comme
S e c u r i t y	C R C	CRC1				
		CRC2				



4 How to go further

Not applicable.

5 References

Cyclic redundancy check calculation unit

Open Portable Trusted Execution Environment

Permission error

Stable: 24.06.2020 - 17:52 / Revision: 24.06.2020 - 12:32

You do not have permission to read this page, for the following reason:

The action "Read pages" for the draft version of this page is only available for the groups ST_editors, ST_readers, Selected_editors, sysop, reviewer

Permission error

Stable: 19.06.2020 - 08:24 / Revision: 19.06.2020 - 08:18

You do not have permission to read this page, for the following reason:

The action "Read pages" for the draft version of this page is only available for the groups ST_editors, ST_readers, Selected_editors, sysop, reviewer

Permission error

Stable: 21.02.2020 - 08:39 / Revision: 04.02.2020 - 15:22

You do not have permission to read this page, for the following reason:

The action "Read pages" for the draft version of this page is only available for the groups ST_editors, ST_readers, Selected_editors, sysop, reviewer

Permission error

Stable: 31.01.2020 - 13:04 / Revision: 31.01.2020 - 13:02

You do not have permission to read this page, for the following reason:



The action "Read pages" for the draft version of this page is only available for the groups ST_editors, ST_readers, Selected_editors, sysop, reviewer

Permission error

Stable: 15.10.2019 - 11:55 / Revision: 15.10.2019 - 11:55

You do not have permission to read this page, for the following reason:

The action "Read pages" for the draft version of this page is only available for the groups ST_editors, ST_readers, Selected_editors, sysop, reviewer

Permission error

Stable: 22.06.2020 - 09:50 / Revision: 22.06.2020 - 09:49

You do not have permission to read this page, for the following reason:

The action "Read pages" for the draft version of this page is only available for the groups ST_editors, ST_readers, Selected_editors, sysop, reviewer